



**Product features** Blue & Red LED indicator display ;  
Ultra-thin design ,could be installed on smooth place  
Waterproof(IP65)  
Building over current protection

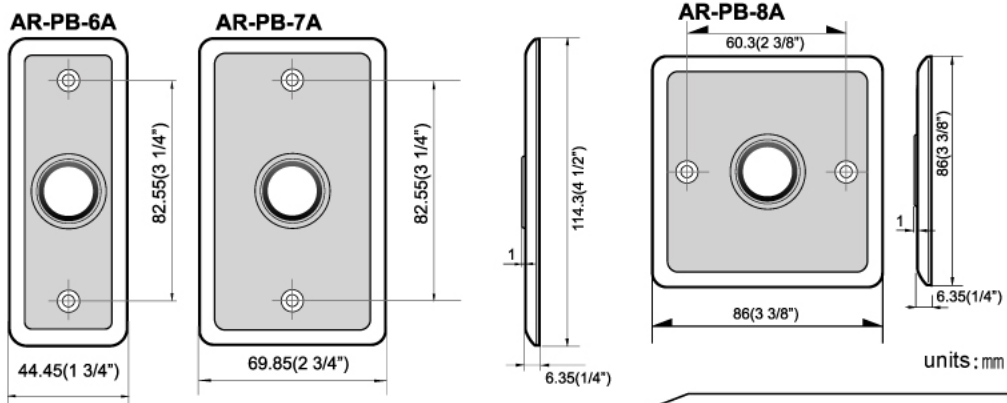

**Wiring**

Red	Black	Purple	Blue	Green
<b>LED Power</b>	<b>Switch Output</b>		<b>LED (Blue/Green)</b>	<b>LED (Red)</b>
+12VDC	COM.	N.O. (Open collector)	Low Active	Low Active

**Diagram**

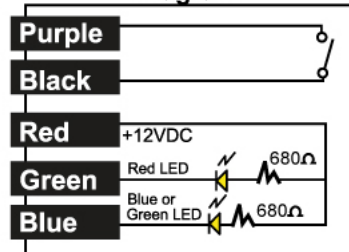

**Specification**

Features	Description	min	typical	max	
Switch Type	Normal Open (N.O.)				
Input Voltage	DC 5 ~ 24	5	12	24	
Switch Current	100mA		100mA		
On Resistance		10	15	25	OHM
Off Resistance		2M	4M	5M	OHM
Protection	Poly Switch	150mA	350mA	500mA	12VDC
Indicator	Red and Blue LED (or Green LED) ( 680Ohm serial resistor for each)		10mA		12VDC
Force		110	200	1000	g
Pulse Time	5VDC	50	350	1000	ms
	12VDC	50	350	1000	ms
	24VDC	100	120	800	ms